

# MCA 100 BIO Portable

MULTICOMPONENT ANALYZER FOR **BIOGAS**



- Analysis of CO<sub>2</sub>, CH<sub>4</sub>, O<sub>2</sub>, H<sub>2</sub>S
- NDIR technology for CO<sub>2</sub> and CH<sub>4</sub>
- Automatic air purge for long life H<sub>2</sub>S cell
- Arm Processor
- Touch Screen monitor
- Ethernet, Wi-fi and USB Remoting
- Low cost ownership
- Portable version with battery pack
- Modbus, Profibus, Ethernet ( optional )
- Autozero
- Data downloadable on USB Pen Drive

The MCA 100 Bio series of gas analyzers by ETG it's the ideal solution for biogas measurement and industrial combustion applications because of their accuracy, stability, reliability, broad measurement range, and the variety of available form factors.

Unlike other analyzers, ETG MCA 100 non-dispersive infrared (NDIR) gas analyzers measure multiple gases in an instrument with a single optical path platform.

Single-gas analyzers are inadequate when using methane as a biofuel because the gas often contains large amounts of CO as a contaminant. ETG analyzers have the ability to measure CO<sub>2</sub>, CO, and O<sub>2</sub> in addition to methane and therefore provide the optimal combination of gases for combustion optimization.

The enhanced optics and electronics of our NDIR analyzers have virtually eliminated zero drift after the initial warm up period. The temperature and pressure compensation eliminates the major causes of span drift in many NDIR instruments.

## MCA 100 BIO MULTICOMPONENT ANALYZER FOR BIOGAS

Measurement Method	Gas	Resolution	Range	Accuracy	Precision	Time
NDIR ( Non-Dispersive Infrared )	<b>Methane</b>	0,01%	0-100%	+/- 1% F.S.	+/- 0,8%	T <sub>90</sub> & T <sub>10</sub> <10 seconds
			201ppm-40%	+/- 2% rel		
			40-80%	+/- 1% rel		
NDIR ( Non-Dispersive Infrared )	<b>Carbon Dioxide</b>	0,01%	0-50%	+/- 0,8 F.S.	+/-0,7%	T <sub>90</sub> & T <sub>10</sub> <10 seconds
			0.00-16.00%	+/- 0,3% abs or +/- 3.0% rel	+/- 0,1% abs or +/- 0.8% rel	
			16.01-20.00%	+/- 5% rel		
Electro-chemical sensor	<b>Oxygen</b>	0,01%	1.01-25.00%	+/- 0,1% abs or +/- 3.0% rel	+/- 0,1% abs or +/- 1.5% rel	< 40 seconds from ambient to 0.15 O <sub>2</sub>
Electro-chemical sensor	<b>Hydrogen Sulfide</b>	1 ppm	0-2000 ppm 0-5000 ppm 0-10000 ppm	+/- 5 ppm abs or +/- 3.0% rel	+/- 5 ppm abs or +/- 3.0% rel	T <sub>90</sub> & T <sub>10</sub> <20 seconds

## SPECIFICATIONS


<b>Response Time</b>	Response times are specified at a sample flow rate of a 1 liter per minute through the MCA 100 sample cell
<b>Data Refresh Rate</b>	1 second
<b>Warm-up Time</b>	30 seconds ready,3 minutes useable,30 minutes to full performance
<b>Operating Temperature</b>	0° to 70° C ( 32° to 158° F)
<b>Operating Humidity</b>	To 95% RH ( Non-condensing)
<b>Operating Altitude</b>	-300 to 3.000 m ( -1.000 to 10.000 ft )
<b>Communications</b>	USB port ( standard )
<b>Case Protection</b>	IP67(1 meter submersion for 30 minutes) • Def Stan 81-41/STANAG 4280

## MCA 100 BIO Portable *MULTICOMPONENT ANALYZER FOR BIOGAS*


<b>Battery</b>	12 Vcc with Internal Charger and light charge indicator
<b>Monitor</b>	Touch Screen 5.7" Resistive type
<b>Calibration</b>	Zero & span user selectable. Automatic calibration ( optional)
<b>External Electrical supply</b>	from 100 to 240 Vac 47-63 Hz
<b>Pneumatic connection</b>	Rapid fittings 6.0 OD 4.0 ID
<b>Mechanical dimensions</b>	43 x 24.4 x 34.1 cm (16.93" x 9.61" x 13.42")
<b>Weight</b>	3.5 kG

### USER INTERFACE OVERVIEW

Bargraph and digital value

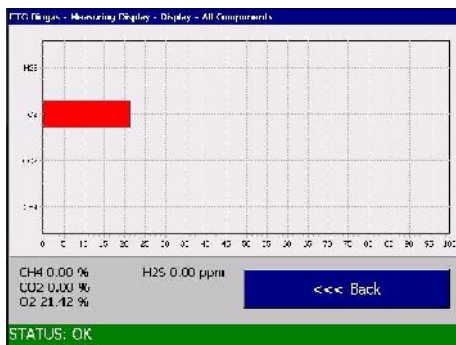

Trend and digital value

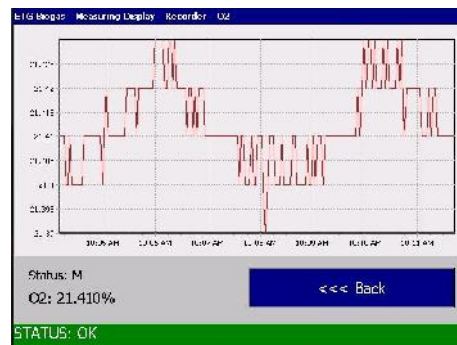

All the ETG MCA 100 and 6500 series for Biogas have Remote Support and Remote Access

- File transfer
- Data monitoring by your PC , tablet and smartphone
- Software update

Other Version of Biogas Analyzers

- Wall mounting Biogas analyzer version model 6500
- 19" Rack Mounting Biogas analyzer model MCA 100 Bio
- Multisampling system for Biogas analysis

Rev. 2.0 - 2015

[www.analisi-biogas.com](http://www.analisi-biogas.com)  
[www.etgrisorse.com](http://www.etgrisorse.com)

**ETG RISORSE E TECNOLOGIA**

Via P. Carpignano 23  
 14026 Montiglio M.to (AT) ITALY  
 Tel. +39 0141 99.4905 Fax 99.49.71  
[sales@etgrisorse.com](mailto:sales@etgrisorse.com)